

EST. 1929

MORLEYS

Supplying Quality Furniture to Schools

Catalogue


DFE Procurement Package

Lot 3: Bleacher Seating



Bleacher Upholstered Seat & Back

Specification Sheet

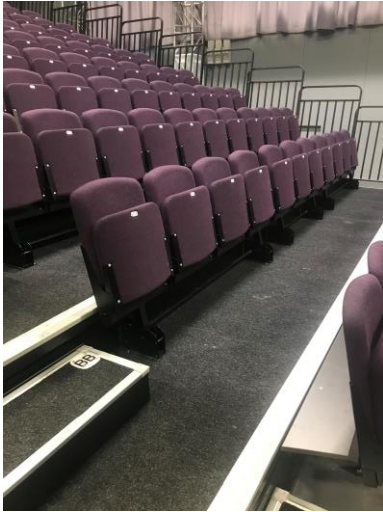

Features:



- Fully upholstered fold down chair with auto-tip seat bottom
- Manual fold down of units in banks of 2,3 or 4 chairs to suit layout.
- Preformed curved plywood seat and back for added comfort.

Finishes:

- Camira Mainline Plus FR Tweed
- Satin black powder coat metalwork
- Marling's Deltacord heavy duty contract carpet to decks

Technical:

- Depth of back Swap 460mm.
- Depth of seat swab 375mm
- 450mm seat crown height
- "T" nut connections to all timber for secure long lasting fixing

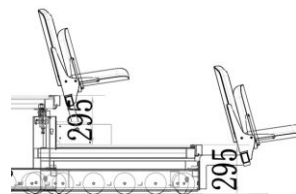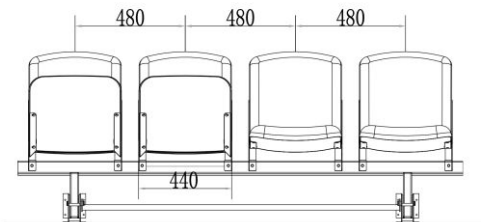

Bleacher Upholstered Benching with Back

Specification Sheet




BENCH: 300mm deep overall. 40mm deep CMHR foam interior supported on 18mm plywood base. Top, fascia and underneath covered in selected material. 458mm seat height when supplied with a standard 295mm rise height.

BACK REST : 225mm deep overall. 40mm deep CMHR foam interior supported on 24mm plywood base. Covered all around with selected material. "T nut" connection to back rest support arms for secure long lasting connection.

FOLDING MECHANISM : Easy to use, manual folding back rest mechanism with no wearing components. Constructed from 40mm x 40mm x 2.5mm, 60mm x 60mm x 6mm and 30mm x 30mm x 2.5mm steel. Finished oven baked epoxy polyester paint in either RAL 9005 or RAL 7016.

COVER MATERIAL : Choice to be made from the Camira Fabrics Mainline Plus range of FR Tweed

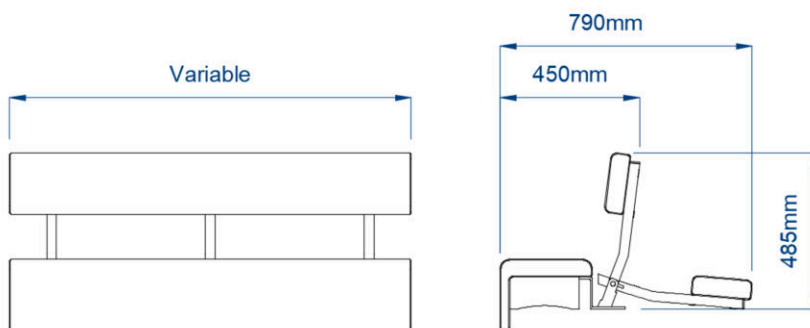

Retractable platform

Specification Sheet

Overview

Unit type:	Wall / floor fixed
Bank width:	10400mm (plus 600mm for self-storing end rails)
Rows:	11 rows of platform with 12 rows of seating
Operation of unit:	Integrally powered (via hand held control unit)
Tread depth:	850mm
Row rise:	295mm
Aisles:	1 No. set @ 1200mm wide
Deck covering:	Marling's Delta Cord heavy duty contract carpet (on 18mm plywood)
Side rails:	2 No. Sets, self-storing type (1100mm high)
Side drapes:	2 No. sets included

Warranty

Mechanism	25 Years*
Foam & Fabric	10 Years

Finish to exposed metalwork is epoxy power coat colour black RAL 9005

The under structure is to consist of steel components, welded and/or bolted together. EN 10219-2--1997 Cold Formed Welded Structural Sections of Non-alloy and Fine Grain Steels.

System to be opened and closed using two power drives.

Friction power drive: Independent four-wheel driving motorized system.

Operation speed:4 m per minute.

Motor Type: Lightweight gear Motor, power will arrange from 550W to 1500 W Drive Ratio: 1:200 .

Driving Wheels: width 150mm and Outer diameter 172mm with 15mm Polyurethane tired drive wheels.

An audible alarm is included which sounds when the telescopic system is opening to ensure maximum safety for operation and by standers

Half steps made from pressed steel EPC finish on each row of the aisle. A detachable half step will be provided for the front row.

Steps come with fluted aluminium nosing with photo luminescent insert strips to be fitted to the front and side of each aisle step tread and to the front edge of each row in the aisle position.

Posi lock LX system used for further stability. When the unit opens the automatic tier catches will lock the structure to prevent forward movement.

Each supporting foot shell is provided with 5 heavy duty wheels. Wheels are mounted on axles for ease of movement and are made from non marking rubber.

*Subject to annual service which can be carried out by any accredited company

EST. 1929

MORLEYS

Supplying Quality Furniture to Schools

Retractable Platform

Specification Sheet

